


QUARTECH

KHZ OF CERAMIC RESONATOR

ELECTRIC CHARAC

Frequency Range	Initial Tolerance of Frequency	Frequency Stability of Temperature	Anging For 10 Yeras	External Capacitance	
				C1	C2
190~249KHz	± 0.5 %	± 0.3 %	± 0.5 %	330 pf	470 pf
250~374KHz	± 0.5 %	± 0.3 %	± 0.5 %	220 pf	470 pf
375~429KHz	± 0.5 %	± 0.3 %	± 0.5 %	120 pf	470 pf
429~1250KHz	± 0.5 %	± 0.3 %	± 0.5 %	100 pf	100 pf

DIMENSIONS (mm)

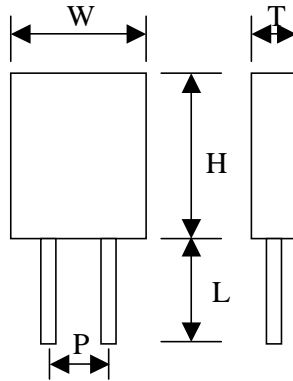

TYPE	W	H	T	P	L
109~249KHz	13.5	14.5	3.8	10.1	8.0
250~374KHz	10.8	12.2	3.8	7.7	7.0
375~429KHz	8.0	9.0	3.3	5.0	7.7
430~519KHz	7.5	8.5	3.3	5.0	6.0
520~699KHz	7.5	7.2	2.8	5.0	4.0
700~1250KHz	5.0	6.0	2.2	2.5	4.0

* Test Circuits

